



# Endless Hot Water...

From Girard Products


## *On-Demand* Induced Draft LP Gas Tankless Water Heater

The Girard Products' **GSWH-1 Tankless Water Heater** incorporates a power blower that forces the combustion air through the heat exchanger (Induced draft). This new design results in a unit capable of providing:

- **Higher Burner Power in a Smaller Package**
- **Higher Combustion Efficiency**
- **Heat Transfer Efficiencies in Excess of 90% without Condensation**
- **Higher Wind Resistance Performance**



MODEL GSWH-1  
(Patent Pending)

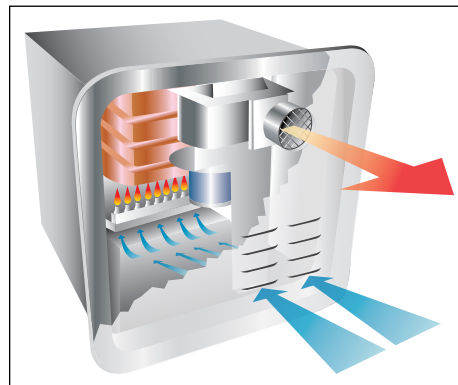

**What is Induced Draft?**  
A power blower forces the combustion air through the heat exchanger (Induced draft) producing instant hot water.



**CSA Approved**





## The RV Industry's First Induced Draft Tankless Water Heater!

### ADDITIONAL FEATURES:

- **Instant Hot Water**  
An unlimited supply of hot water when you need it plus no recovery time!
- **Energy Efficient**  
Heat only the water you use. The GSWH1 Tankless Water heater uses 60% less LP gas than current tank models. No tank means no heat loss!
- **Lightweight**  
Over 65% lighter than conventional tank model water heaters. Why carry 50-90 lbs. of additional dead weight?
- **Less Space**  
12.5"H x 12.5" W X 15.5" D
- **CSA Approved**  
CSA approved and certified:  
Designed specifically for RVs.
- **Electronic Ignition - State of the Art Electronics**  
No pilot lights or manual burners to keep lighting or adjusting.
- **Temperature Rise**  
40° - 60° temperature rise (depending on water flow).



- **DUAL BTU**  
For improved energy efficiency, you can change the burner from *Hi-Flame* to *LOW-Flame* (depending on the incoming water temperature).
- **No By-Pass Valving Needed**  
The GSWH-1 tankless water heater has no storage tank to by-pass when winterizing the unit.
- **No Rust or Sediment**  
Since there is no storage tank, you can forget about replacing anode rods and cleaning rust and sediment out of a tank.
- **TWO YEAR LIMITED WARRANTY**

### Specifications

BTU/HR	34,000 – 27,000
Fuel	Propane (LP Gas)
Inlet Pressure	10.5" WCI Min TO 14" WCI Max
Manifold Pressure	8" – 10" WCI Max
Power Input	12VDC < 3 amp
Water Operating Pressure	125 PSI Max
Maximum Water Temperature	125° F
Dimensions	W 12.5" x H 12.5" x D 15.5"
Shipping Weight (w/shipping box)	23 lbs.



GIRARD PRODUCTS. LLC.

### Girard Products LLC.,

1361 Calle Avanzado, San Clemente, CA 92673

Toll Free: 866.559.1221, Local: 949.259.4024

Fax: 949.276.5502

[www.greenrvproducts.com](http://www.greenrvproducts.com)